

NOTE:
Suggested number of chairs are 4 pieces/m²

NOTE:
Duplicated numbers of entries are / single/m

NOTE:


224 POS BS 1-3, 1-4, 1-5
SECTION 1-1

NOTE:


1234.4

224 POS BS 1-4
10-35-00m

- NOTES:**
- a. ALL DIMENSIONS ARE IN CM, ELEVATIONS ARE IN METER
 - b. CONCRETE GRADE C30/37
 - c. HIGH SULPHATE-RESISTANT PORTLAND CEMENT SHALL BE USED FOR ALL CONCRETE AND MORTAR SUBJECT TO CONTACT WITH SULPHATE AND/OR CHLORIDE CONTAINING WATERS OR SUBJECT TO CONTACT WITH SEWERAGE OR SEWAGE GAS
 - d. STEEL REINFORCEMENT BARS QUALITY - B500
 - e. STEEL FABRIC QUALITY - B500
 - f. CONCRETE COVER -
 - a. FOR LIQUID RETAINING STRUCTURE - 50MM
 - b. FOR UNDERGROUND STRUCTURE - 40MM
 - c. FOR OUTDOOR CONCRETE WORKS - 35MM
 - d. FOR INDOOR CONCRETE WORKS - 25MM
 - g. CHECK ALL DIMENSIONS AND CONSTRUCTION SITE

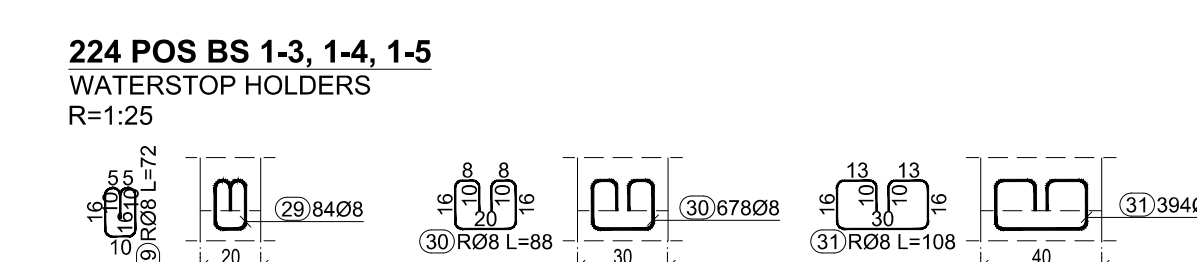

224 POS BS 1-3, 1-4, 1-5

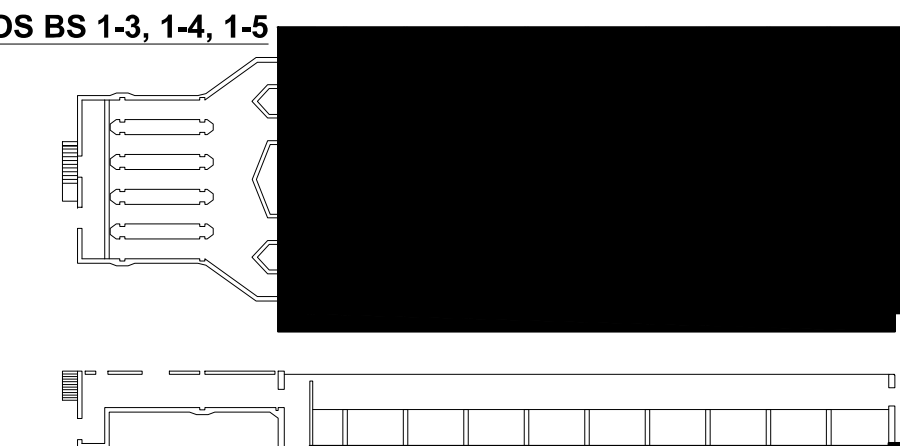

TIM GLOBAL
ENGINEERING